


PLAN
SIDEWALK ADJACENT TO CURB

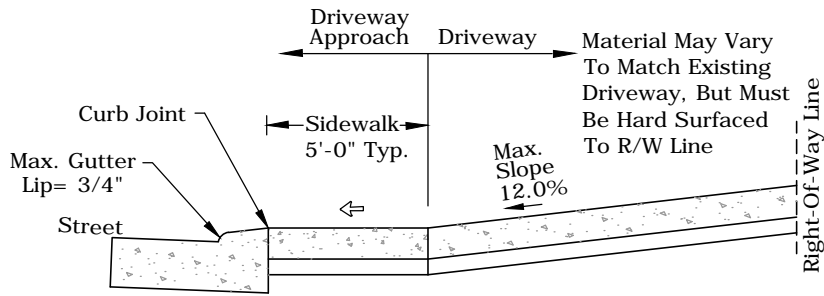

See Dwg. 1010 For Driveway Pavement Section

SECTION A-A
Not to Scale

LEGEND:

- ↔ Slope 1.5% Max Design
Slope 2% Max Finish Grade
- ← Slope 7.5% Max Design
Slope 8.3 Max Finish Grade
See Note 6

DRIVEWAY WIDTH TABLE		
LOT FRONTAGE WIDTH	MINIMUM DRIVEWAY WIDTH	MAXIMUM DRIVEWAY WIDTH
Up To 50 Feet	10 Feet	24 Feet
From 51 Feet To 60 Feet	10 Feet	24 Feet + 1 Foot Per Foot Of Lot Frontage In Excess Of 50 Feet
Greater Than 60 Feet	10 Feet	35 Feet

NOTES: RESIDENTIAL DRIVEWAYS

- 1) Use Oregon Commercial Grade Concrete Per Section 00440.
- 2) Trowel Curb Joints With A Minimum 1/2" Radius Along Back Of Curb.
- 3) Place 1/2" Premolded Asphalt Impregnated Material Or Equal. Expansion Joints Extend From Subgrade To Finish Grade. Provide At Cold Joints, End Of Driveways And Each Side Of Inlet Structures.
- 4) Space Contraction Joints At A Max. Of 10'.
- 5) Design Slopes May Be Exceeded To Fit Existing Conditions, Not to Exceed Finish Grade Slope.
- 6) Slope May Be Exceeded If Ramp Length Is 15'.



WASHINGTON COUNTY
DEPARTMENT OF LAND USE &
TRANSPORTATION
ENGINEERING SECTION

**RESIDENTIAL
DRIVEWAY APPROACH
(CURBTIGHT SIDEWALK)**

PLOT STAMP: 08/02/19 1:41P MACHENNAB
CAD: 1030-2.DWG

EFFECTIVE DATE: **9/01/2019**

WASH. CO. # **1030**