


ROADWAY PRISM AREAS

OUT OF ROADWAY PRISM AREAS

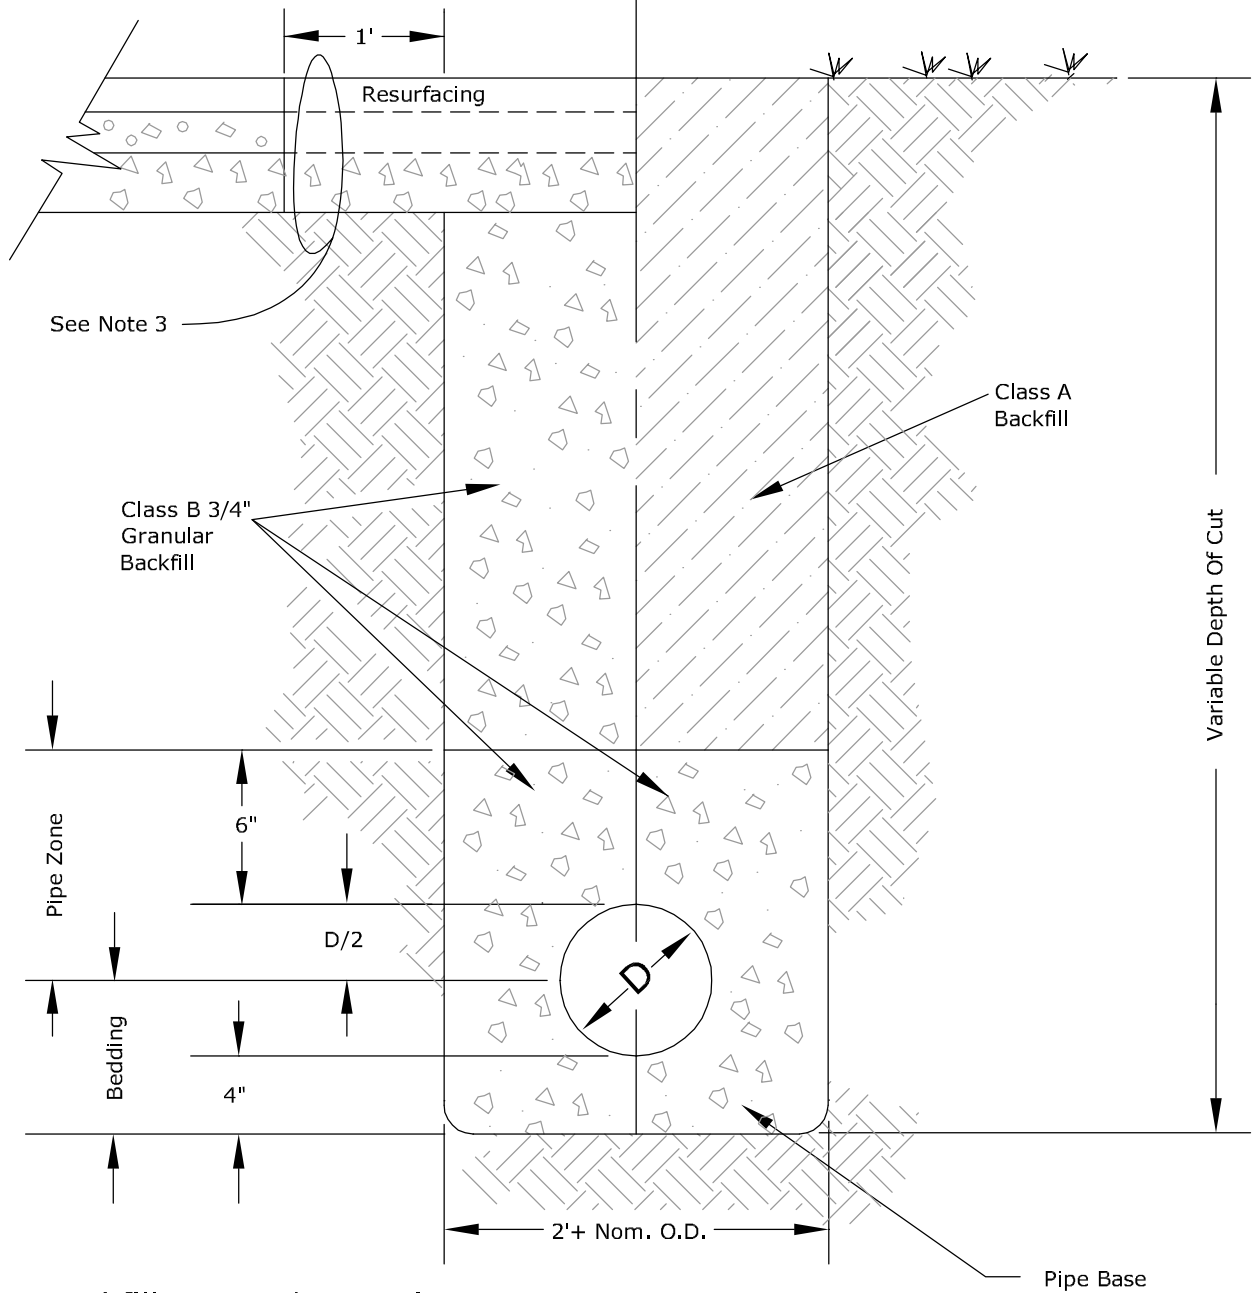

Backfill In Roadway Prism Areas

NOTES:

1. Minimum Backfill Compaction Requirements: Top 3' Of Backfill, 95% Of T-99; Below 3', 90% Of T-99.
2. After Backfill And T-Cut Patch, A Mill And Fill 2" Thick May Be Required To Maintain The Travel Lane Integrity.
3. Restore With Design Or Existing Road Structural Section. When A.C. Thickness In Existing Road Section Is Less Than 3", A Minimum 3" Of A.C. Is Required.



WASHINGTON COUNTY
 DEPARTMENT OF LAND USE &
 TRANSPORTATION
 ENGINEERING SECTION

**PIPE BEDDING
 AND BACKFILL DETAILS**

PLOT STAMP: 01/03/17 4:47P KELLYE
 CAD: 3020.DWG

EFFECTIVE DATE: **1/01/2017**

WASH. CO. # **3020**