




**PLAN VIEW**  
N.T.S.

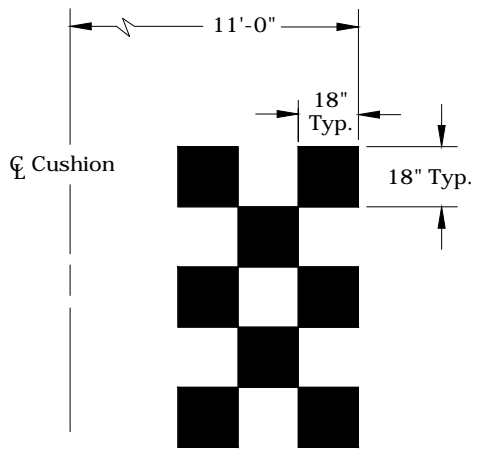

**PAVEMENT MARKING DETAIL**  
N.T.S.

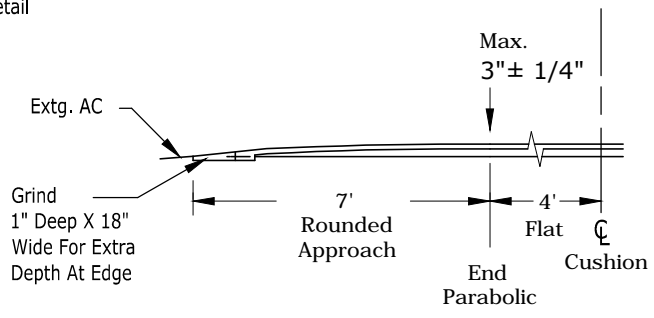

**SECTION VIEW A - A**  
Symetrical About ☒  
N.T.S.

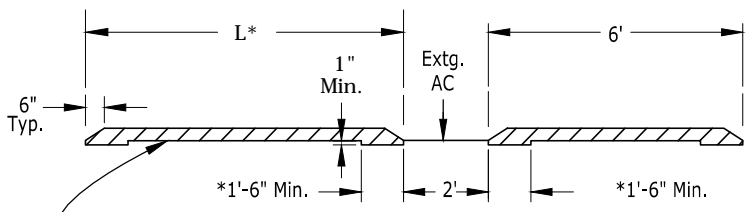

**SECTION VIEW B - B**  
N.T.S.

Level 2 - 1/2" Dense ACP Mixture

\*Grind 1" Deep X 18" Wide For Extra Depth At Edge

**Notes:**

- 1) Asphalt Shall Be Rolled For Compaction Per Specifications. Finish Edges By Applying Tackcoat & Sand Sweepings.
- 2) Signs May Be Req'd At The Direction Of The Engineer.
- 3) Cushion Shall Not Be Placed On Road Grades Greater Than 8%.
- 4) Pavement Markings Shall Be White Type B - Preformed Fused Thermoplastic Film.

\* Length May Be From 7.5' To 4.5' Depending On Roadway Width.  
Do Not Install If L\* Is Less Than 4'

**ASPHALTIC CONCRETE  
SPEED CUSHION DETAILS**



WASHINGTON COUNTY  
DEPARTMENT OF LAND USE &  
TRANSPORTATION  
ENGINEERING SECTION

**SPEED CUSHION  
ROAD WIDTH GREATER THAN 26'  
SPEED GREATER THAN 25 M.P.H.**

PLOT STAMP: 08/02/19 3:40P MACHENNAB  
CAD: 6061(2).DWG

EFFECTIVE DATE: 9/01/2019

WASH. CO. # 6061