

ADA Curb Ramp New Construction Inspection Form (End of Walk)

North-South Road Name

Project No.

Sheet No.

Intersection No.

East-West Road Name

See https://www.oregon.gov/odot/Engineering/Documents_RoadwayEng/ADA_ExhibitA.pdf for more corner styles.
Use Washington County corner numbering system.


Calibration Date





(mm/dd/yy)

Ramp Style

Use the End of Walk style inspection form where sidewalk ends at locations that are not intersections. Turning Space may be measured at either the top or bottom of the ramp run.

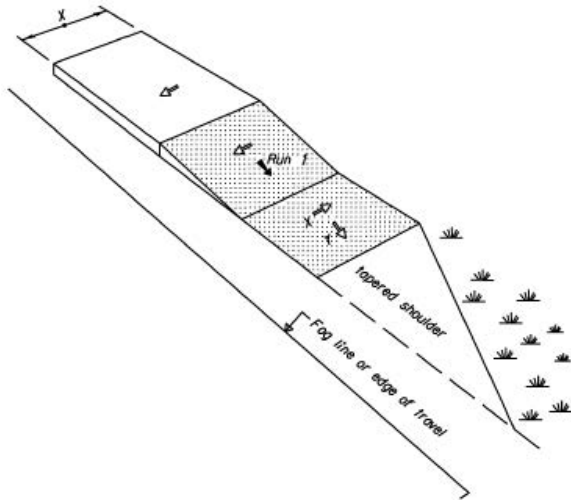See also *Standard Drawings* to assess provisions not shown: (inlets, alignment, etc.)



-  Pedestrian access route (To measure clear width)
-  Cross slope (design to 1.5% max. to achieve 2.0% finish grade)
-  Running slope (design to 7.5% max to achieve 8.3% finish grade)
-  Level area (X & Y) (design to 1.5% max to achieve 2.0% finish grade / 4' x 4' min.)

RAMP RUN 1 Pass Fail


Running Slope 1	≤ 8.3%	>8.3%
Length 1		
Cross Slope 1	≤ 2.0%	>2.0%
Detectable Warning (Y/N)	Y	N
Lip Height	1/4"	>1/4"

Location of Landing in Relation to Ramp (top or bottom)
 Transition Type (tapered or cont.)
 Change of Direction at End of Walk (Y/N)
 End of Walk Barricade Posted (Y/N)

TURN SPACE/LANDING	NEITHER	Pass	Fail
Width X	≥ 4.0'	< 4.0'	
Length Y	≥ 4.0'	< 4.0'	
Slope X	≤2.0%	> 2.0%	
Slope Y	≤2.0%	> 2.0%	

MISCELLANEOUS Traversable Pass Fail

Flare Slope 1	≤ 10%	> 10%
Flare Slope 2	≤ 10%	> 10%
Clear Width (feet)	≥ 4.0'	< 4.0'
Slope of the Road		
Horizontal Gaps	≤ 1/2"	> 1/2"

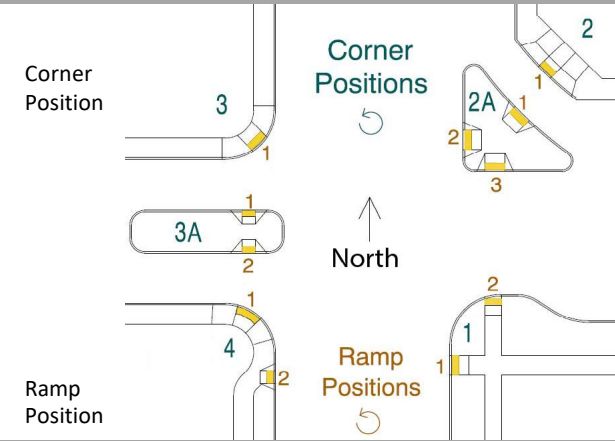

PE Stamp (required for private development)

Comments:

Inspector's Signature _____ Date _____
 Print name clearly _____ Certification No. _____
 Company/Agency _____

ADA Curb Ramp Images

Attached photos must be in .pdf format in order to be placed